






GRADO TWIN

www.oktalite.com/grado-twin-t

Type of luminaire	track light
Application areas	Aisle zone illumination, base illumination
Pan/tilt range	swivel range 220°
Mounting	3P Power Track Typ Global DALI, not suitable for vertical mounting
Lighting technology	LED ^{IQ} DALI
LED Luminous Flux Class	3000 lm - 5000 lm
Light colour White	2700 K, 3000 K, 3000 K - Efficient White, 3000 K - Brilliant Colour, 3500 K, 4000 K, 4000 K - Efficient Cool
Cooling	passive
Supply unit	DALI driver integrated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	DALI DT6
Installation	Recommended for new installation.
Weight	Approx. 2.7 kg
Components	 Luminaire housing
Test seal	  



Technical details as well as weight specifications and measurements have been prepared with care. Errors excepted. All dimensions in mm · LED service life data: L80/B10 at ambient temperature (ta) 25°C. Rated lamp service life 50,000h. Luminous flux and efficiency specifications are subject to a tolerance of /- 10%. Min CRI Ra: >80 / >90· Product images are used as an example and may differ from the original · We reserve the right to make changes, insofar as they serve progress. The Single Lighting Regulation (SLR) documentation can be found in our download area. Oktalite Lichttechnik GmbH · Mathias-Brüggen-Str. 73 · 50829 Cologne · T 49 221 59767-0 · F 49 221 59767-40 · mail@oktalite.com · www.oktalite.com · 2023-05-15



GRADO TWIN

oktalite

LED Luminous Flux Class	Light colour	CRI R _a	system luminous flux	System performance	max. luminaires B16	Order number		
						white	silver	black
3000 lm	3000 K - Brilliant Colour	97	2 x 3065 lm	64 W	25	10187374	10187375	10187376
4000 lm	3000 K - Efficient White	94	2 x 4090 lm	68 W	25	10187371	10187372	10187373
	4000 K - Efficient Cool	91	2 x 4300 lm	68 W	25	10249807	10249808	10249809
5000 lm	2700 K	81	2 x 4720 lm	72 W	25	10187365	10187366	10187367
	3000 K	83	2 x 4855 lm	72 W	25	10187368	10187369	10187370
	3500 K	85	2 x 4950 lm	72 W	25	10187377	10187378	10187379
	4000 K	83	2 x 5115 lm	72 W	25	10187380	10187381	10187382

Efficient White: R_y = 75, R_f = 91, R_g = 102Brilliant Colour: R_y = 94, R_f = 95, R_g = 104

Technical details as well as weight specifications and measurements have been prepared with care. Errors excepted. All dimensions in mm · LED service life data: L80/B10 at ambient temperature (ta) 25°C. Rated lamp service life 50,000h. Luminous flux and efficiency specifications are subject to a tolerance of +/- 10%. Min CRI Ra: >80 / >90 · Product images are used as an example and may differ from the original · We reserve the right to make changes, insofar as they serve progress. The Single Lighting Regulation (SLR) documentation can be found in our download area. Oktalite Lichttechnik GmbH · Mathias-Brüggen-Str. 73 · 50829 Cologne · T 49 221 59767-0 · F 49 221 59767-40 · mail@oktalite.com · www.oktalite.com · 2023-05-15



Optic - LED^{IQ} DALI

Optic GRADO TWIN - LED^{IQ} DALI

oktalite

Optic Specially designed reflector
Type Optic integrated

Beam angle


Wide Flood

Cover

LOR

without

93 %

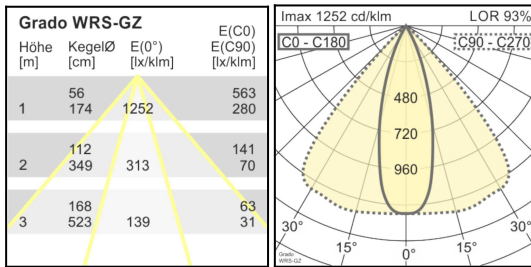

Technical details as well as weight specifications and measurements have been prepared with care. Errors excepted. All dimensions in mm · LED service life data: L80/B10 at ambient temperature (ta) 25°C. Rated lamp service life 50,000h. Luminous flux and efficiency specifications are subject to a tolerance of +/- 10%. Min CRI Ra: >80 / >90 · Product images are used as an example and may differ from the original · We reserve the right to make changes, insofar as they serve progress. The Single Lighting Regulation (SLR) documentation can be found in our download area. Oktalite Lichttechnik GmbH · Mathias-Brüggen-Str. 73 · 50829 Cologne · T 49 221 59767-0 · F 49 221 59767-40 · mail@oktalite.com · www.oktalite.com · 2023-05-15