






# JUNO


TRACK LIGHT


"Systematic illumination of goods thanks to optimum light distribution with visible free-form lens: track-mounted spotlight JUNO provides retail

- 



**Optimum light distribution**  
By means of novel directional lighting control with free-form lens instead of a reflector
- 

**Ideal applications**  
Systematic illumination of goods on back walls or on promotional areas
- 

**New design language**  
With visible, teardrop-shaped lens and significant long-distance effect
- 

**Easy alignment**  
Spotlight head that can be swivelled though 40°; easy, precise adjustment thanks to scale
- 





**Intelligent lighting**  
LED<sup>IQ</sup> for your smart lighting management system




# JUNO

# oktalite

[www.oktalite.com/juno-t](http://www.oktalite.com/juno-t)

Type of luminaire	track light
Application areas	Aisle zone illumination, base illumination
Pan/tilt range	355° turning range, 80° swivel range
Mounting	3P Power Track Typ Global DALI, not suitable for vertical mounting
Lighting technology	LED <sup>IQ</sup> DALI
LED Luminous Flux Class	5000 lm
Light colour White	2700 K, 3000 K, 3000 K - Efficient White, 3500 K, 4000 K, 4000 K - Efficient Cool
Cooling	passive
Supply unit	DALI driver integrated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	DALI DT6
Installation	Recommended for new installation.
Weight	Approx. 1.7 kg
Components	 Luminaire housing
Test seal	  

**LED<sup>IQ</sup> DALI**

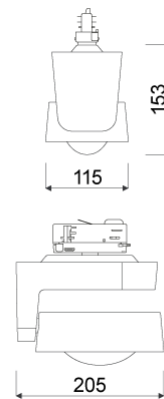

Technical details as well as weight specifications and measurements have been prepared with care. Errors excepted. All dimensions in mm · LED service life data: L80/B10 at ambient temperature (ta) 25°C. Rated lamp service life 50,000h. Luminous flux and efficiency specifications are subject to a tolerance of /- 10%. Min CRI Ra: >80 / >90· Product images are used as an example and may differ from the original · We reserve the right to make changes, insofar as they serve progress. The Single Lighting Regulation (SLR) documentation can be found in our download area. Oktalite Lichttechnik GmbH · Mathias-Brüggen-Str. 73 · 50829 Cologne · T 49 221 59767-0 · F 49 221 59767-40 · mail@oktalite.com · www.oktalite.com · 2022-11-29



# JUNO

# oktalite

LED Luminous Flux Class	Light colour	CRI R <sub>a</sub>	system luminous flux	System performance	max. luminaires B16	Order number		
						white	silver	black
5000 lm	2700 K	> 80	4400 lm	36 W	60	10221438	10221439	10221440
	3000 K	> 80	4525 lm	36 W	60	10221441	10221442	10221443
	3000 K - Efficient White	> 90	4745 lm	46 W	20	10221450	10221451	10221452
3500 K	3500 K	> 80	4610 lm	36 W	60	10221444	10221445	10221446
	4000 K	> 80	4765 lm	36 W	60	10221447	10221448	10221449
	4000 K - Efficient Cool	> 90	5025 lm	46 W	20	10249819	10249820	10249821



Efficient White: R<sub>s</sub> = 75, R<sub>f</sub> = 91, R<sub>g</sub> = 102

Technical details as well as weight specifications and measurements have been prepared with care. Errors excepted. All dimensions in mm · LED service life data: L80/B10 at ambient temperature (ta) 25°C. Rated lamp service life 50,000h. Luminous flux and efficiency specifications are subject to a tolerance of +/- 10%. Min CRI Ra: >80 / >90 · Product images are used as an example and may differ from the original · We reserve the right to make changes, insofar as they serve progress. The Single Lighting Regulation (SLR) documentation can be found in our download area. Oktalite Lichttechnik GmbH · Mathias-Brüggen-Str. 73 · 50829 Cologne · T 49 221 59767-0 · F 49 221 59767-40 · mail@oktalite.com · www.oktalite.com · 2022-11-29



# Optic Juno - LED <sup>IQ</sup> DALI

# oktalite

Optic

Freeform lens

Type

Optic integrated

### Beam angle


#### Oval light distribution

Cover

LOR

without

87 %

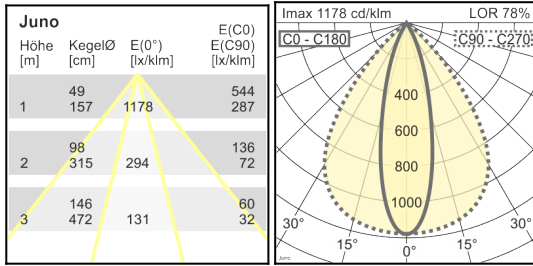

Technical details as well as weight specifications and measurements have been prepared with care. Errors excepted. All dimensions in mm · LED service life data: L80/B10 at ambient temperature (ta) 25°C. Rated lamp service life 50,000h. Luminous flux and efficiency specifications are subject to a tolerance of +/- 10%. Min CRI Ra: >80 / >90 · Product images are used as an example and may differ from the original · We reserve the right to make changes, insofar as they serve progress. The Single Lighting Regulation (SLR) documentation can be found in our download area. Oktalite Lichttechnik GmbH · Mathias-Brüggen-Str. 73 · 50829 Cologne · T 49 221 59767-0 · F 49 221 59767-40 · mail@oktalite.com · www.oktalite.com · 2022-11-29